



35Y4

HALF-WAVE VACUUM RECTIFIER

35Y4

GENERAL DATA

Electrical:


	Without Panel Lamp	With No.40 or No.47 Panel Lamp [▲]	
Heater, for Unipotential Cathode:			
Voltage (AC or DC):			
Entire Heater (pins 1 & 8) . . .	35	32	volts
Panel-Lamp Section (pins 1 & 4) . .	7.5	5.5	volts
Current { between pins 1 & 8 . . .	0.15	-	amp
between pins 4 & 8 . . .	-	0.15	amp

▲ Under typical operating conditions shown below.

Mechanical:

Mounting Position.	Any
Maximum Overall Length	3-5/32"
Maximum Seated Length.	2-5/8"
Maximum Diameter	1-3/16"
Bulb	T-9
Base	Lock-in 8-Pin
Basing Designation for BOTTOM VIEW	5AL

Pin 1 - Heater
Pin 2 - Plate
Pin 3 - No Connection
Pin 4 - Heater Tap
Pin 5 - No Connection
Pin 6 - No Connection



Pin 7 - Cathode
Pin 8 - Heater
Plug - Base Shell
Panel-Lamp Heater
Section is be-
tween pins 1 & 4

HALF-WAVE RECTIFIER

Maximum Ratings, Design-Center Values:

PEAK INVERSE PLATE VOLTAGE	700 max.	volts
PEAK PLATE CURRENT	600 max.	ma
DC OUTPUT CURRENT:		
With Panel Lamp & { No Shunting Resistor. . .	60 max.	ma
Shunting Resistor . . .	90 max.	ma
Without Panel Lamp	100 max.	ma
PANEL-LAMP-SECTION VOLTAGE (RMS):		
When panel lamp fails.	15 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode . .	300 max.	volts
Heater positive with respect to cathode . .	300 max.	volts

Typical Operation With No.40 or No.47 Panel Lamp
in Circuit Below with Capacitor-Input Filter:

AC Plate-Supply Volt. (RMS)	117	117	117	117	235	volts
Filter-Input Capacitor . .	40	40	40	40	40	μf
Min. Total Effective						
Plate-Supply Impedance .	15	15	15	15	100	ohms
Panel-Lamp Shunting Res. .	-	300	150	100	-	ohms
DC Output Current.	60	70	80	90	60	ma

DEC. 30, 1947

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA

35Y4



35Y4

HALF-WAVE VACUUM RECTIFIER

Typical Operation Without Panel Lamp in Conventional Half-Wave Circuit with Capacitor-Input Filter:


AC Plate-Supply Voltage (RMS)	117	235	volts
Filter-Input Capacitor	40	40	μ f
Min. Total Effective Plate-Supply Imped.	15	100	ohms
DC Output Current	100	100	ma
DC Output Voltage at Input to Filter (Approx.):			
At half-load current (50 ma.)	140	280	volts
At full-load current (100 ma.)	120	235	volts
Voltage Regulation (Approx.):			
Half-load to full-load current	20	45	volts

Maximum Circuit Values:

Panel-Lamp Shunting Resistor:*

For dc output current of	70 ma. . . .	800 max.	ohms
	80 ma. . . .	400 max.	ohms
	90 ma. . . .	250 max.	ohms

* Required when dc output current is greater than 60 ma.

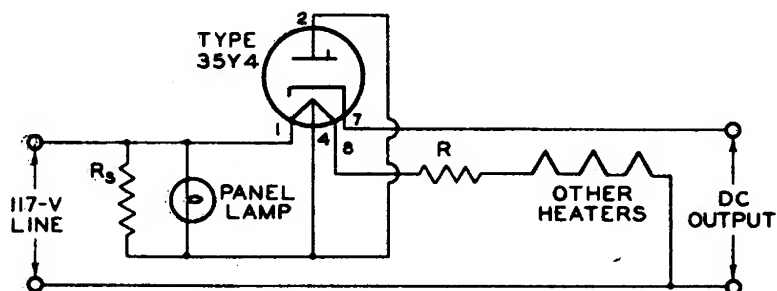

DROP ACROSS R AND ALL HEATERS (WITH PANEL LAMP) SHOULD EQUAL 117 VOLTS AT 0.15 AMPERE. R_s = SHUNTING RESISTOR REQUIRED WHEN DC OUTPUT CURRENT EXCEEDS 60 MILLIAMPERES

92CS-6626

Many of the devices and arrangements shown or described herein use inventions of patents owned by RCA or others. Information contained herein is furnished without assuming any responsibility for its use.

DEC. 30, 1947

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA